

# Bracton High Performance Under Counter Dishwasher Range UC450 / UC500 Series

The new Bracton Dishwashers represent the next step in evolution for commercial dishwashers, using the latest technology to provide greater reliability at the best price!

- Low voltage touch panel – safer, more reliable and no more sticky buttons!
- 1 Minute or Soak cycle
- Stainless 304 Rinse Tank
- Satin Finish - Stainless 304 Body.
- Minimal water usage per cycle (3.5L) minimising environmental impact resulting in lower chemical, water & electricity bills.
- Easy to clean – Accessible filters.
- Auto start / One button start.
- Robust brass solenoids


## ***Ergonomics & Safety***

- Easy glide racks
- Splash proof controls
- Cycle cut-out micro switch in case of accidental door opening
- 12 month warranty

# Technical

<b><u>CYCLE</u></b>	<b><u>UC450 SERIES</u></b>	<b><u>UC500 SERIES</u></b>
Cycle Times	1 min / 3 min (soak)	1 min / 3 min (soak)
Cold Rinse	Option	No
Detergent Pump	Standard	Standard
Rinse Aid Pump	Standard	Standard
<b><u>ELECTRICITY</u></b>		
Power supply	230v 50 Hz	230v 50 Hz
Amps	15A	15A
Washing pump	550w	550w
Boiler heated element	3000w	3000w
Tank heated element	2000w	2000w
<b><u>WATER SUPPLY</u></b>		
Temperature	65°C	65°C
Pressure	200 – 400 Kpa	200 – 400 Kpa
Flow Rate Minimum	20 Litres per min	20 Litres per min
Hot Water consumption per cycle	3.5 Litres	3.5 Litres
Connection	20mm (R¾ BSP Male)	20mm (R¾ BSP Male)
Waste	40mm	40mm
<b><u>PERFORMANCE</u></b>		
Theoretical output (racks per hour)	55	55
<b><u>FORM</u></b>		
Rack dimensions	450mm x 450mm	500mm x 500mm
Net weight	48Kg	52Kg
Rack Clearance	270mm	330mm
Dimensions	See Below	See Below

\* Bracton UC450 has optional variable legs to suit the specific venue. (10mm - 275mm)

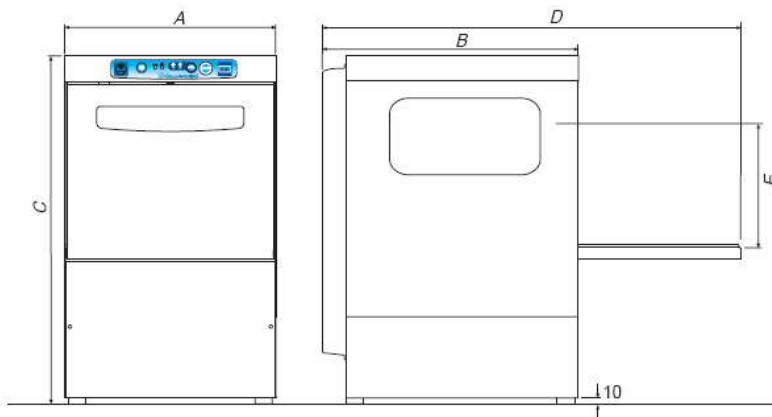

	<b>UC450</b>	<b>UC500</b>
A =	530mm	600mm
B =	600mm	600mm
C =	755mm	820mm
D =	940mm	1005mm
E =	270mm	330mm

Bracton Industries (NSW) P/L  
 50 Chard Rd, Brookvale NSW 2100 Australia  
 Phone: (02) 9997 8849 Fax: (02) 9905 0979